



Purus Line

Designsluk i rustfritt stål.

Materiale: Syrefast rustfritt stål En 1.4404 / SS 2347
Godstykkelse: 1,5 mm

Rister i 8 ulike mønstre.

Klemring for innfesting av membran. 10 alternative slukdelar. 7 lengder. Monteringssett for ulike gulvtyper.

Line rister



ArtDeco

L:300 L:600 L:700 L:800 L:900 L:1000

ArtDeco

340 12 61 340 12 62 340 12 63 340 12 64 340 12 65 340 12 66



Calypso

Calypso

340 12 71 340 12 72 340 12 73 340 12 74 340 12 75 340 12 76



Classic

Classic

340 12 81 340 12 82 340 12 83 340 12 84 340 12 85 340 12 86



Drop

Drop

340 12 91 340 12 92 340 12 93 340 12 94 340 12 95 340 12 96



Steel

Steel

340 14 01 340 14 02 340 14 03 340 14 04 340 14 05 340 14 06



Tile *

Tile

340 14 21 340 14 22 340 14 23 340 14 24 340 14 25 340 14 26

* OBS! på risttypen tile er også rammen integrert i risten



Twist

Twist

340 13 01 340 13 02 340 13 03 340 13 04 340 13 05 340 13 06




Wave

Wave


340 13 11 340 13 12 340 13 13 340 13 14 340 13 15 340 13 16

Purus Line

Line rammer

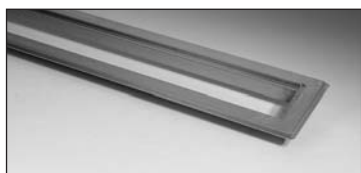

Ramme må velges etter plassering.
Grunnen er at rammebredden er kompensert for overlapp av veggflisenes tykkelse der rammen ligger an mot vegg.




Venstre

L:300	L:600	L:700	L:800	L:900	L:1000
340 12 11	340 12 12	340 12 13	340 12 14	340 12 15	340 12 16




Høyre

340 12 21	340 12 22	340 12 23	340 12 24	340 12 25	340 12 26
-----------	-----------	-----------	-----------	-----------	-----------




Bak

340 12 31	340 12 32	340 12 33	340 12 34	340 12 35	340 12 36
-----------	-----------	-----------	-----------	-----------	-----------



3 sider

340 12 41	340 12 42	340 12 43	340 12 44	340 12 45	340 12 46
-----------	-----------	-----------	-----------	-----------	-----------









Frittstående

340 12 51	340 12 52	340 12 53	340 12 54	340 12 55	340 12 56
-----------	-----------	-----------	-----------	-----------	-----------

For eksakte rammemål i forhold til renne, se tabell på neste side!

Purus Line


Ramme/rist mål

Type installasjon	Ramme bredde	Ramme L:	Rennelengde					
			300	600	700	800	900	1000
 Frittstående	92	Ramme L:	273	573	673	773	873	973
 Mot vegg senter	103	Ramme L:	273	573	673	773	873	973
 Mot vegg bak/venstre	103	Ramme L:	285	585	685	785	885	985
 Mot vegg bak/høyre	103	Ramme L:	285	585	685	785	885	985
 Mot vegg 3 sider	103	Ramme L:	297	597	697	797	897	997
 Tile rist/ramme	52	Ramme L:	234	534	634	734	834	934

OBS! På risttypen Tile er også rammen integrert i risten.

Purus Line

Rennedel








Lengde	NRF nr.	
	Med klemramme	Uten klemramme
300	340 12 01	340 15 81
600	340 12 02	340 15 82
700	340 12 03	340 15 83
800	340 12 04	340 15 84
900	340 12 05	340 15 85
1000	340 12 06	340 15 86

Slukdel




NRF nr	Type	Utøp	Ø mm	Anboring
340 10 62	S 50	Side	50	-
340 10 61	S 75	Side	75	-
340 10 73	S 50	Gavel side	50	-
340 10 74	S 75	Gavel side	75	-
340 10 64	B 50	Bunn	50	-
340 10 63	B 75	Bunn	75	-
340 10 71	S 32 Avløpstrakt	Side	32	-
340 10 72	S 40 Avløpstrakt	Side	40	-
340 10 66	S 50 ANB	Side	50	32/40 mm
340 10 65	S 75 ANB	Side	75	32/40 mm
340 10 68	B 50 ANB	Bunn	50	32/40 mm
340 10 67	B 75 ANB	Bunn	75	32/40 mm
340 10 75	S 50 LAV	Side	50	
340 10 76	S 40 LAV	Side	40	
340 10 77	S 32 LAV	Side	32	

Purus Line

Sluktype	Renne L:	300	600	700	800	900	1000
 <p>Side-/gavl utløp Ø50 og Ø75 H: Ø50 A: Ø75 A:</p>		132 107 95	132 107 95	134 109 97	136 111 99	137 112 100	139 114 102
 <p>Bunnutløp Ø50 H: Ø75 H:</p>		187 212	187 212	204 229	206 231	209 234	210 235
 <p>Sideutløp m/anboring Ø50 og Ø75 H: A: B:</p>		227 147 55	227 147 55	229 149 57	231 151 59	234 154 62	235 155 63
 <p>Bunnutløp m/anboring Ø50 H: Ø75 H: B:</p>		257 282 55	257 282 55	274 299 57	276 301 59	279 304 62	290 305 63
 <p>Lavbyggende Ø50 H: Ø50 A:</p> <p>Avløpstrakt Ø32 H: Ø32 A: Ø40 H: Ø40 A:</p>		79 54	79 54	81 56	83 58	84 59	86 61

Avstander til avløp

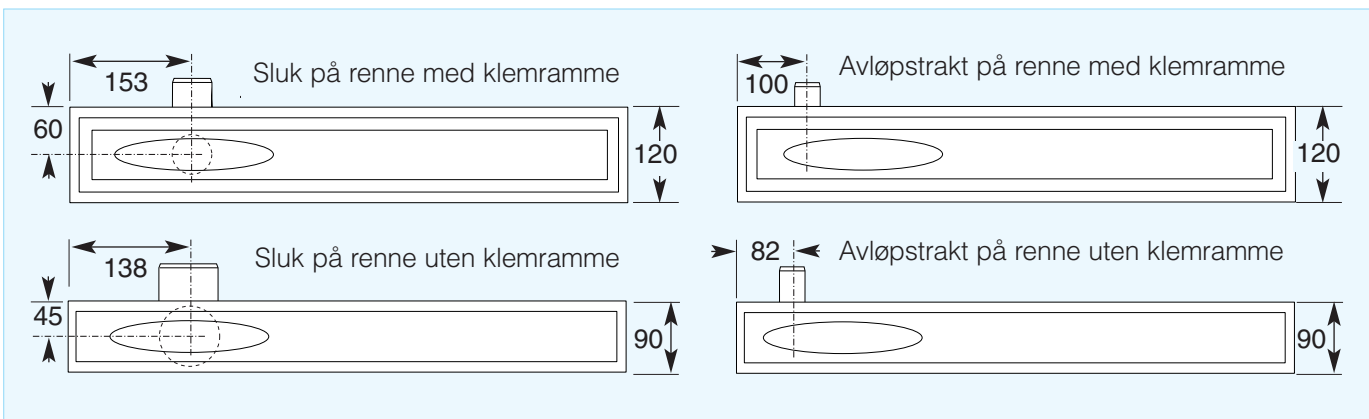

Purus Line


Forhøyning, teleskopisk justerbar 43-72 mm




Lengde	NRF nr.
300	340 15 71
600	340 15 72
700	340 15 73
800	340 15 74
900	340 15 75
1000	340 15 76

Brukes der det ønskes påstøp over membran. Forhøyningens bunndel skrues fast i rennedelen. Den øvre delen stilles inn i rett høyde og skrues fast i den nedre delen.

Monteringssett for trebjelkelag mot vegg




0 mm påstøp




13 og 25 mm påstøp.

Lengde	Høyde 0 NRF nr.	Høyde 13 NRF nr.	Høyde 25 NRF nr.
300	340 15 01	340 15 11	340 15 21
600	340 15 02	340 15 12	340 15 22
700	340 15 03	340 15 13	340 15 23
800	340 15 04	340 15 14	340 15 24
900	340 15 05	340 15 15	340 15 25
1000	340 15 06	340 15 17	340 15 26

Monteringssett for trebjelkelag, frittstående




0 mm påstøp.



13 og 25 mm påstøp.

Lengde	Høyde 0 NRF nr.	Høyde 13 NRF nr.	Høyde 25 NRF nr.
300	340 15 31	340 15 41	340 15 51
600	340 15 32	340 15 42	340 15 52
700	340 15 33	340 15 43	340 15 53
800	340 15 34	340 15 44	340 15 54
900	340 15 35	340 15 45	340 15 55
1000	340 15 36	340 15 46	340 15 56


Monteringssett for støpt gulv, mot vegg



Monteringssett består av 2 eller 3 vegg-braketter.

Lengde	NRF nr.
300-900	340 15 61
1000	340 15 62

Monteringssett for støpt gulv, frittstående



Monteringssett består av 2 eller 3 justerbare støtteben med ekstra distansehylser.

Lengde	NRF nr.
300-900	340 15 66
1000	340 15 67